

ROCKETRUCK

Mobile Fuel Cell Generator



SPECIFICATIONS

Output:

120/208 VAC, 60 HZ, THREE-PHASE 4-WIRE AND/OR SINGLE PHASE
THREE WIRE

OUTPUT POWER:

THREE PHASE UP TO 50KVA CONTINUOUS

ONBOARD FUEL STORAGE:

94 KG HYDROGEN AT 350 BAR

Operates at up to 1500 kW-HR electrical

(6 days continuous at 10kW, 50 hours at 30kW... or as needed)

CONTROL:

GRID FORMING WITH ON-BOARD CONTROLLER


COOLING:

FORCED-AIR WITH INTEGRATED FANS

WEIGHT:

12,800 POUNDS (5818 kg)

Fuel Efficiency Comparison

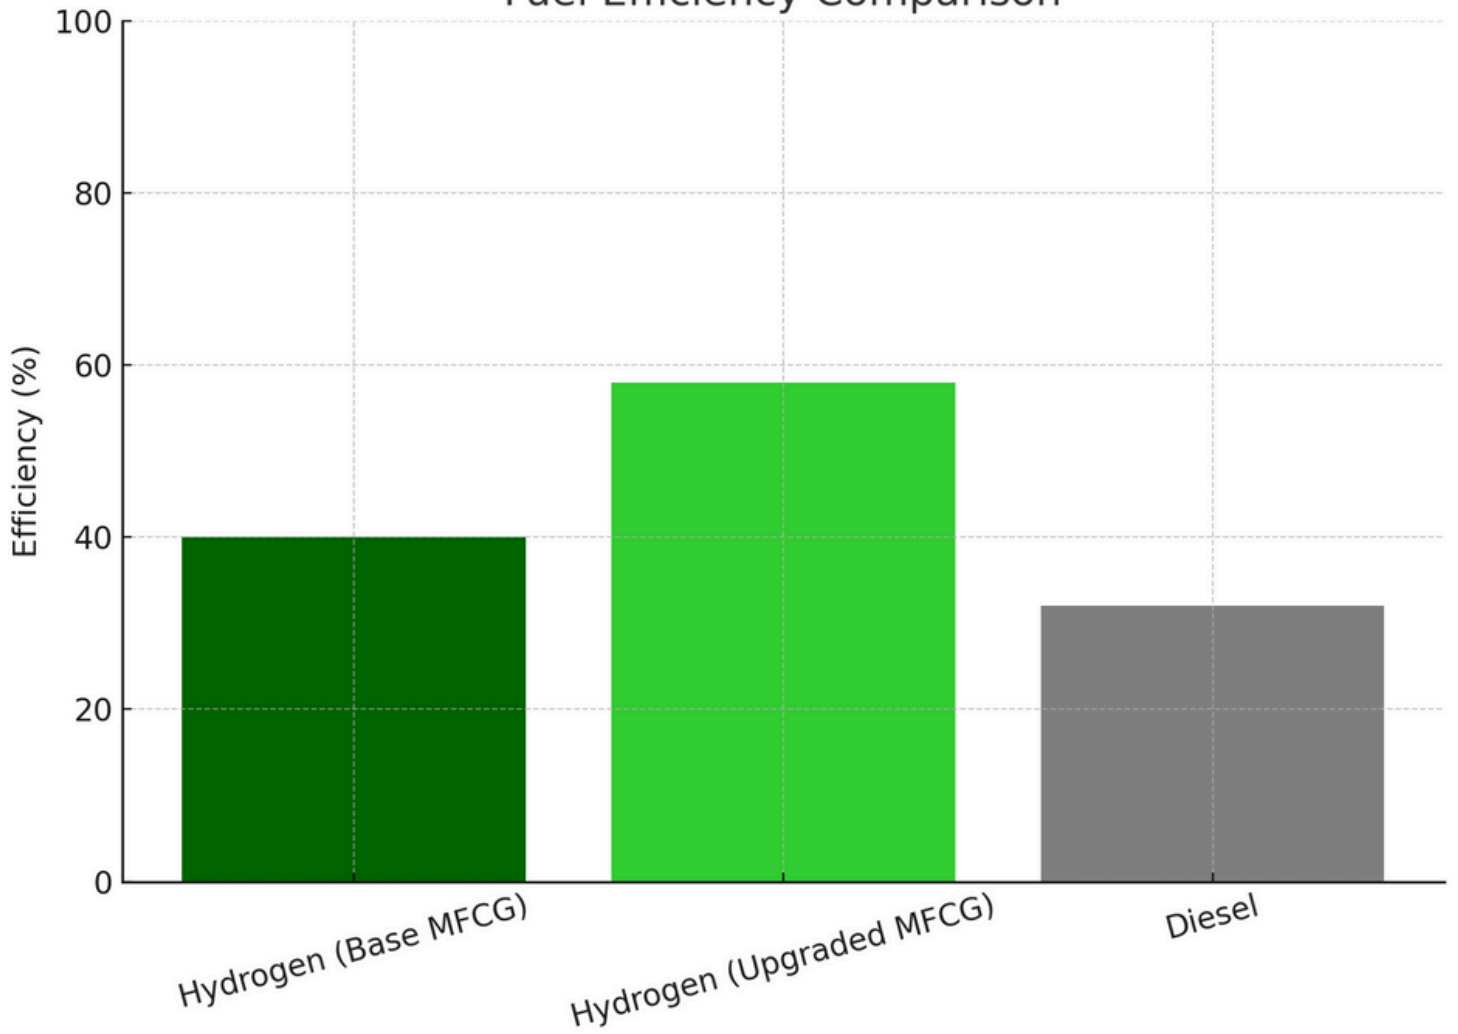

Power Output Over Time

